



SHEEN OVERSEAS

DISCOVER LUXURY GROUNDED IN NATURE WITH SHEEN OVERSEAS. WHERE
EVERY SLAB TELLS A STORY OF ENDURING BEAUTY.



3D

SERIES



PGVT

GVT

600x1200 mm

Glossy





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_001






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_002

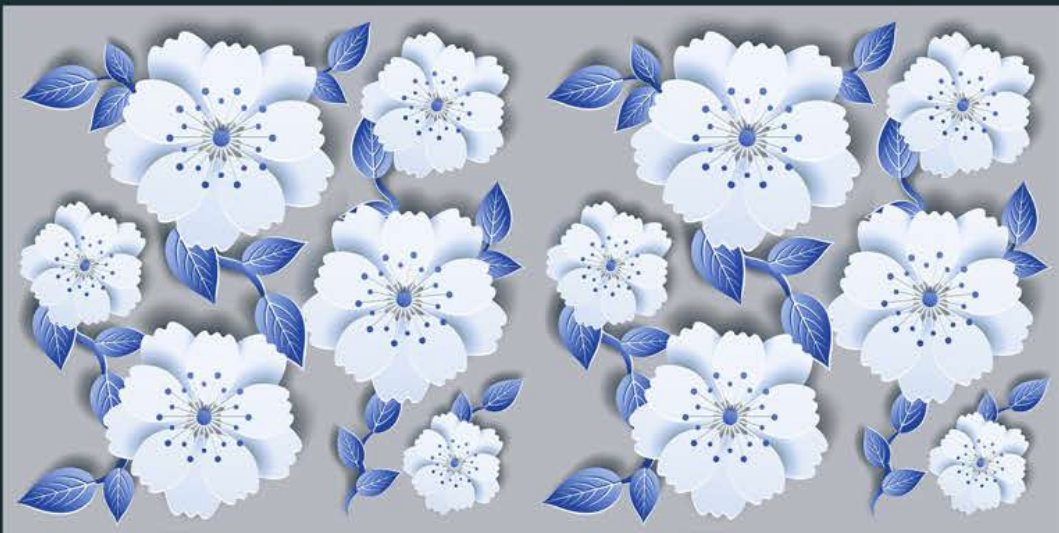



Size :
600 x 1200

Finish :
GLOSSY

EM 3D_003





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_004





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_005






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_007

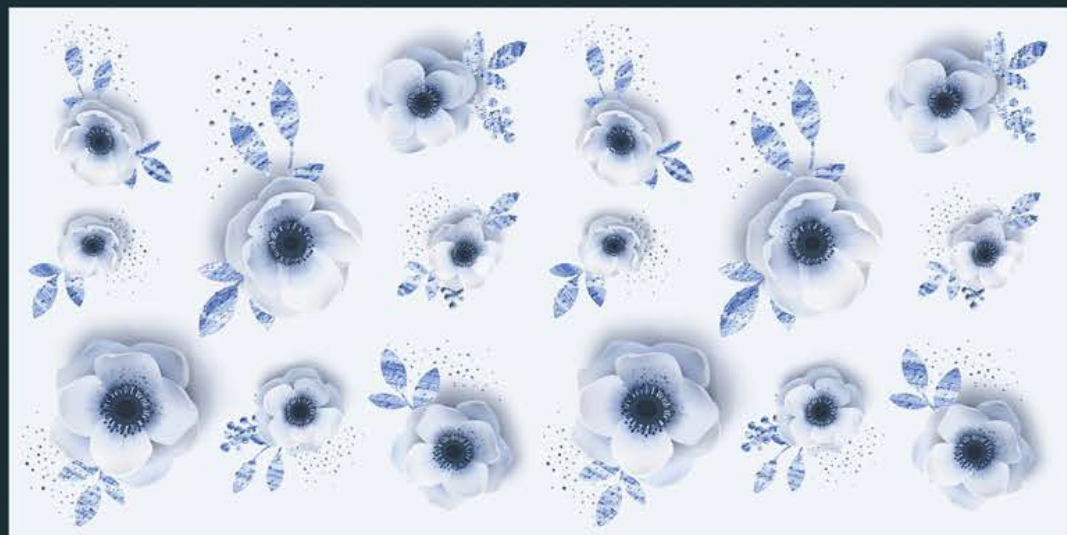





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0012

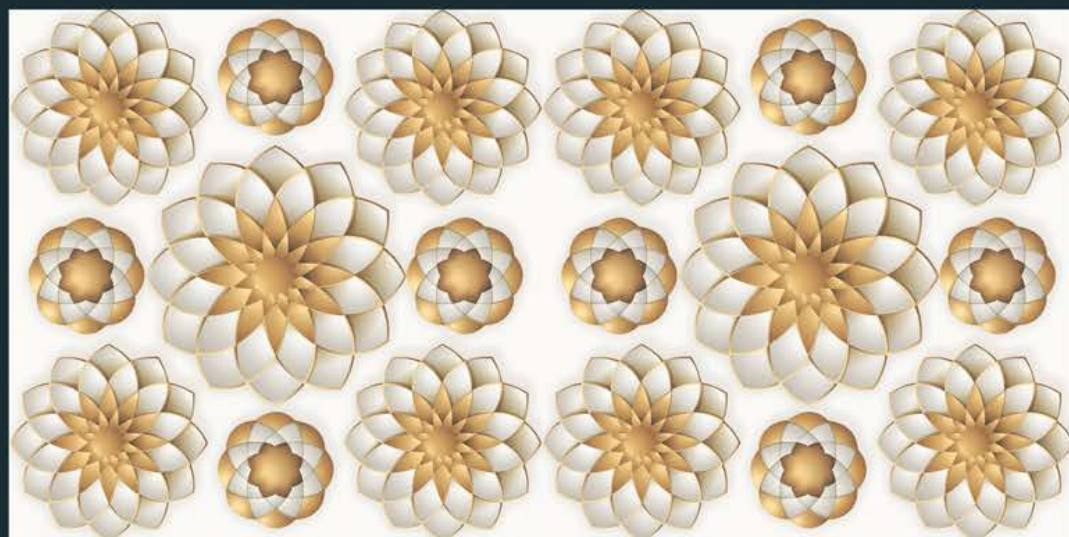

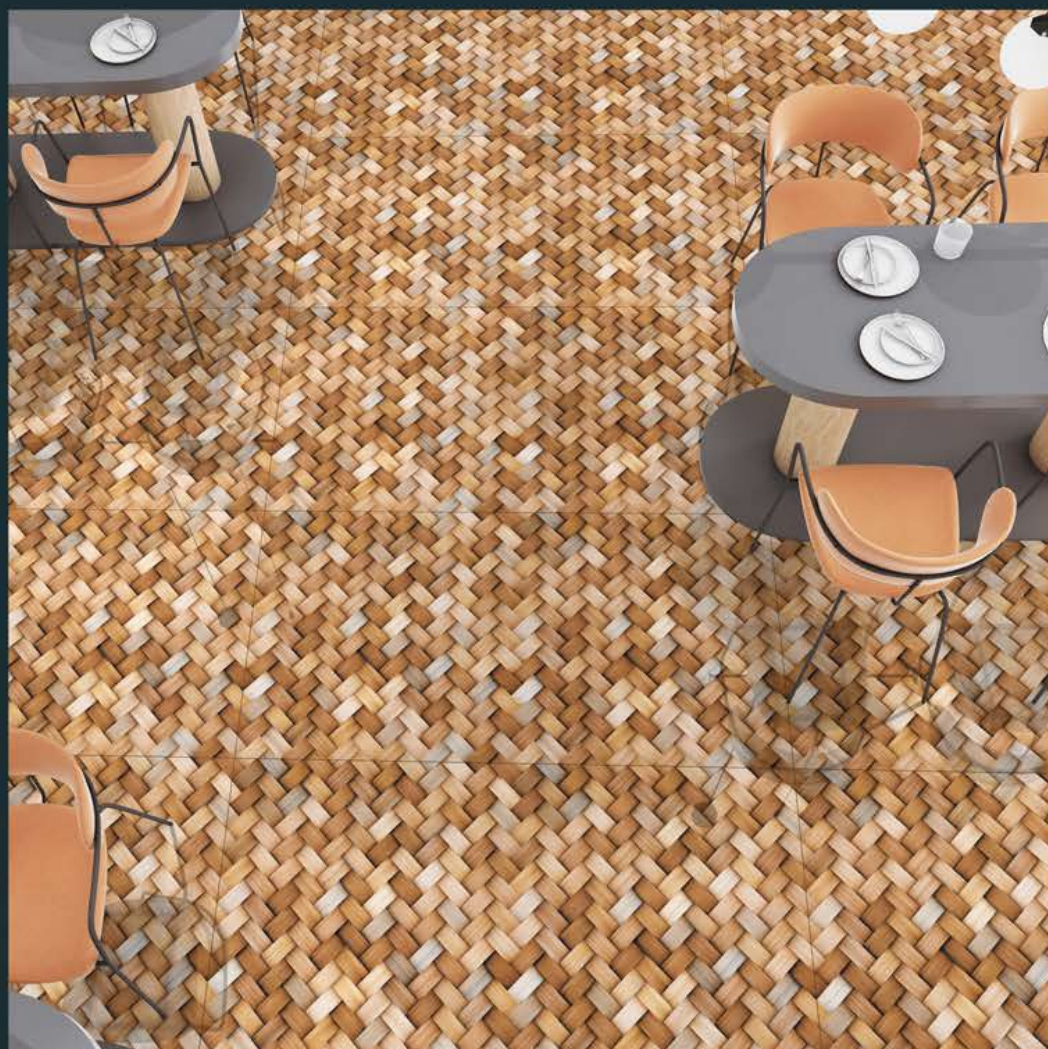

Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0013






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0014

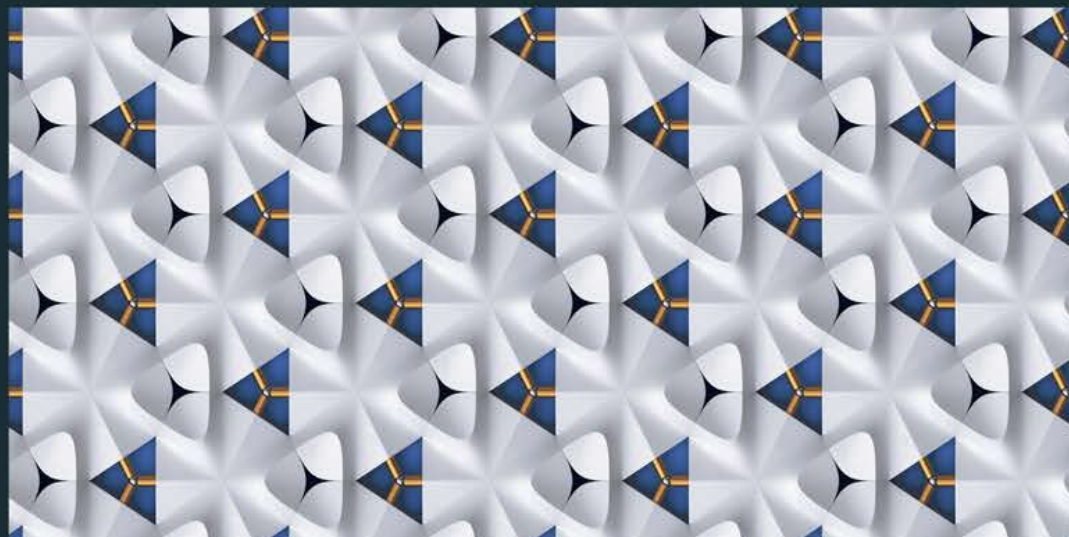



Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0015






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0017

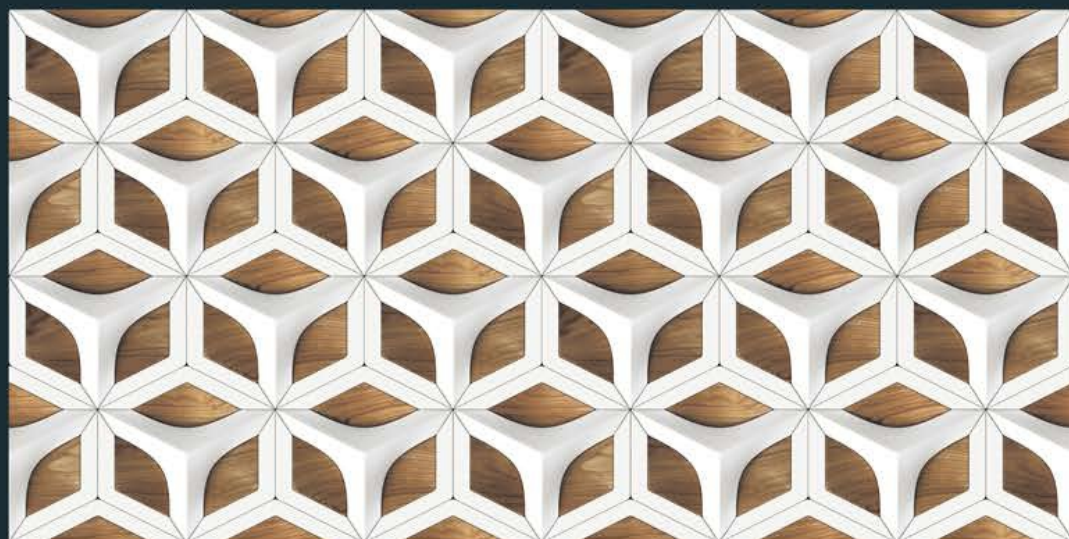



Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0020





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0022





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0023






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0025

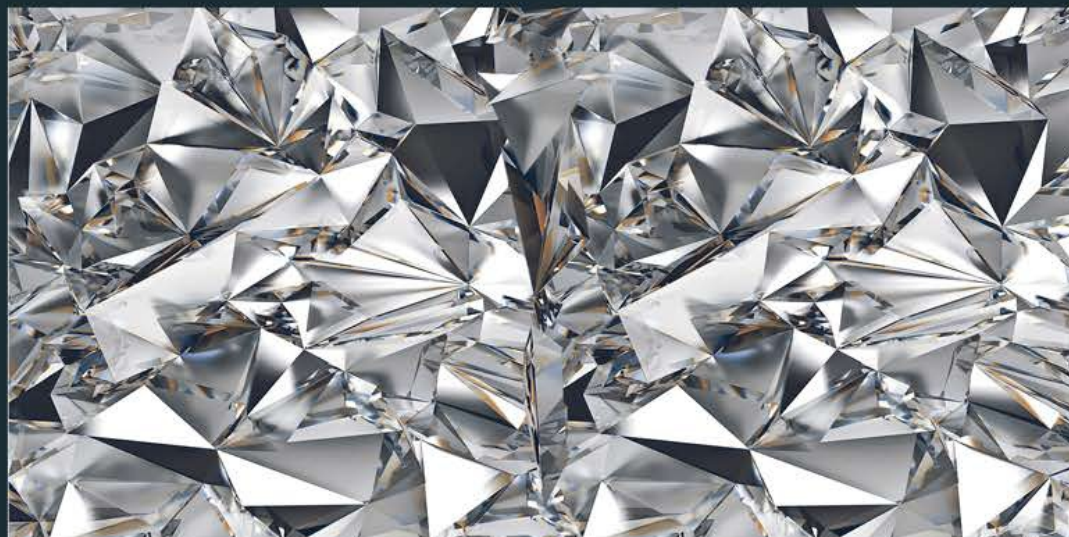



Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0026





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0027






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0028

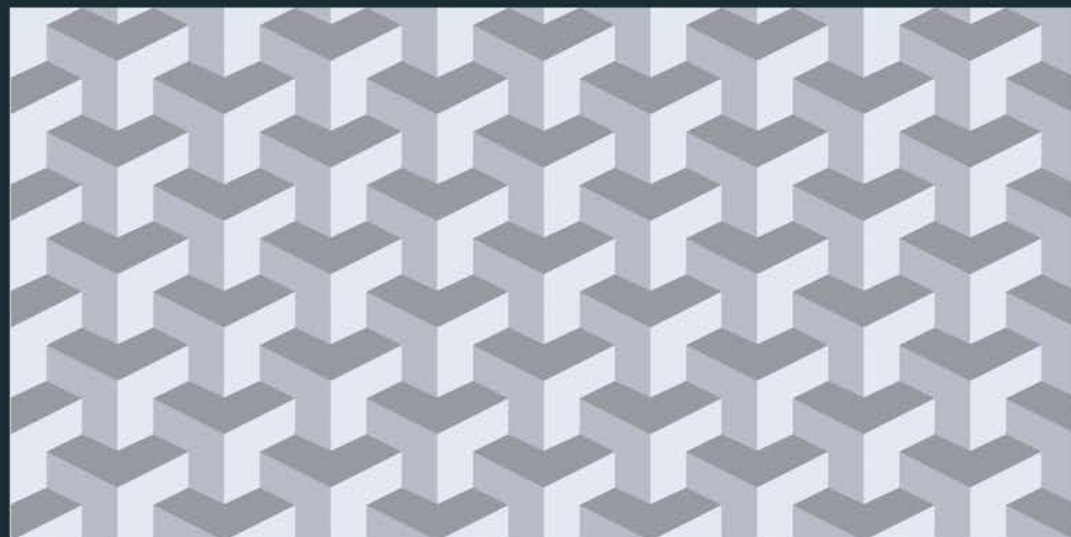



Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0029





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0034






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0036

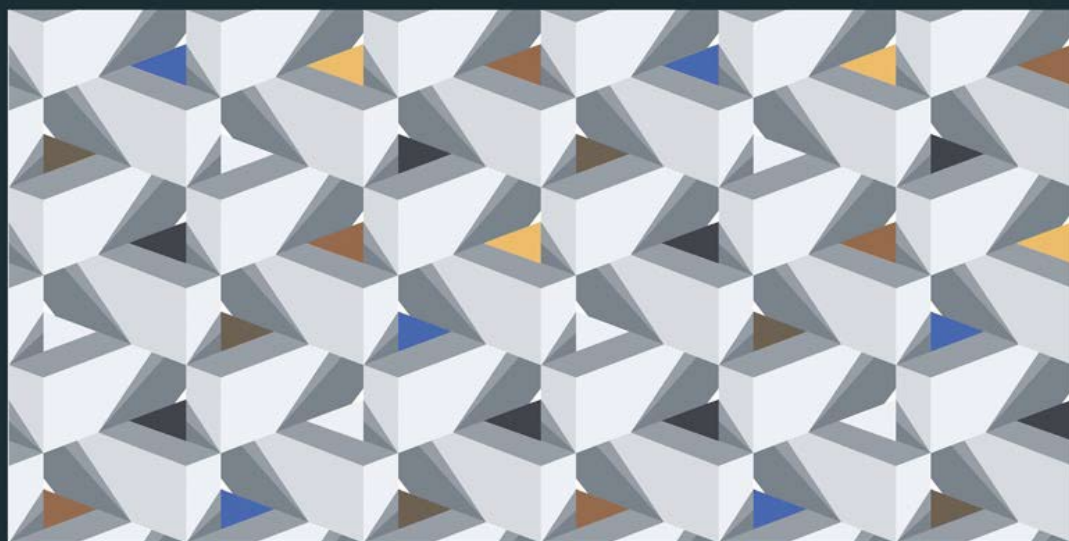



Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0037





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0038





Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0039






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0040

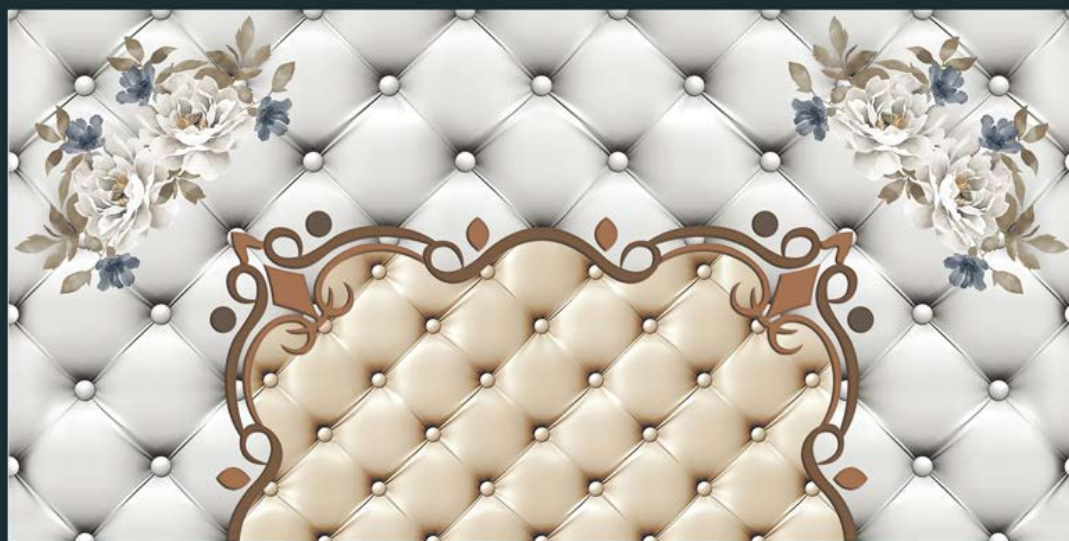



Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0041






Size :
600 x 1200

Finish :
GLOSSY

EM 3D_0042

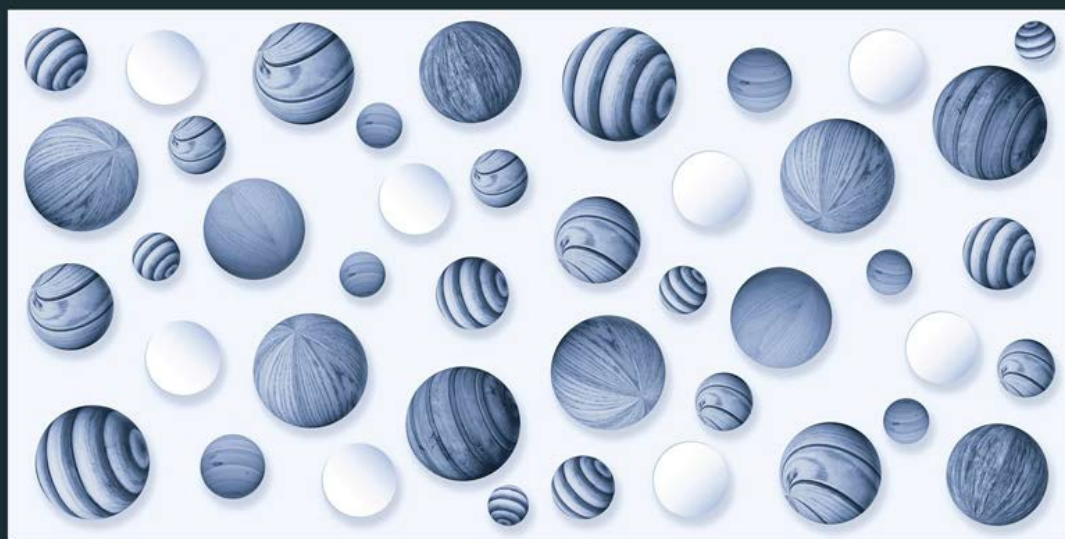

TECHNICAL SPECIFICATION



CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP BIa	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD
----------------	--	-------------------------------	-----------------------------	-------------

REGULATORY PROPERTIES

Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER

STRUCTURAL PROPERTIES

Water absorption	< 0.50 %	<0.05%	<0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082

MASSIVE MECHANICAL PROPERTIES

Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5

SURFACE MECHANICAL PROPERTIES

Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101

THERMO HYGROMETRIC PROPERTIES

Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11

CHEMICAL PROPERTIES

Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14

SAFETY PROPERTIES

Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

PACKING DETAILS

SR. NO	PRODUCT	NOMINAL SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600x1200mm	8.50 mm	2	1.44 Sq. Mtr.

