

# SHEEN

# OVERSEAS

DISCOVER LUXURY GROUNDED IN NATURE WITH SHEEN OVERSEAS. WHERE EVERY SLAB TELLS A STORY OF ENDURING BEATY.

# Onyx

## Collection


GVT | PGVT

600 x 1200 mm

Vitrified Tiles






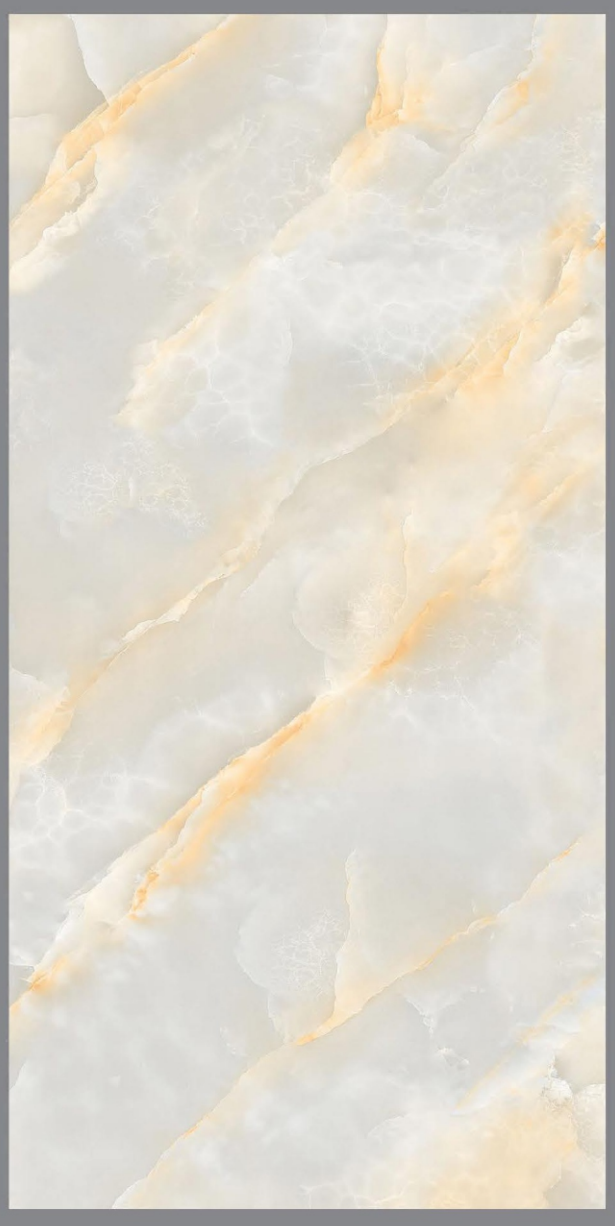


# CLOUD ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

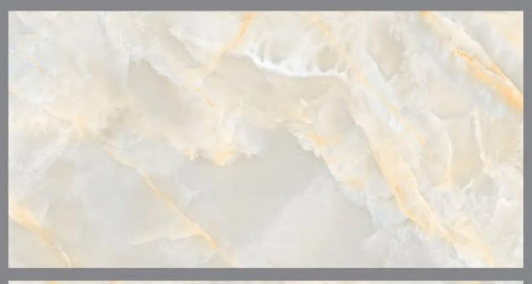

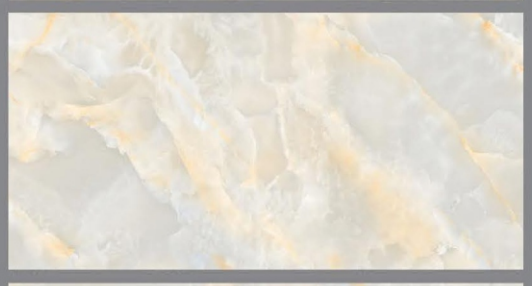







# CRYSTAL ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

**Random :**
**3**









# DEKTON GOLD


**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

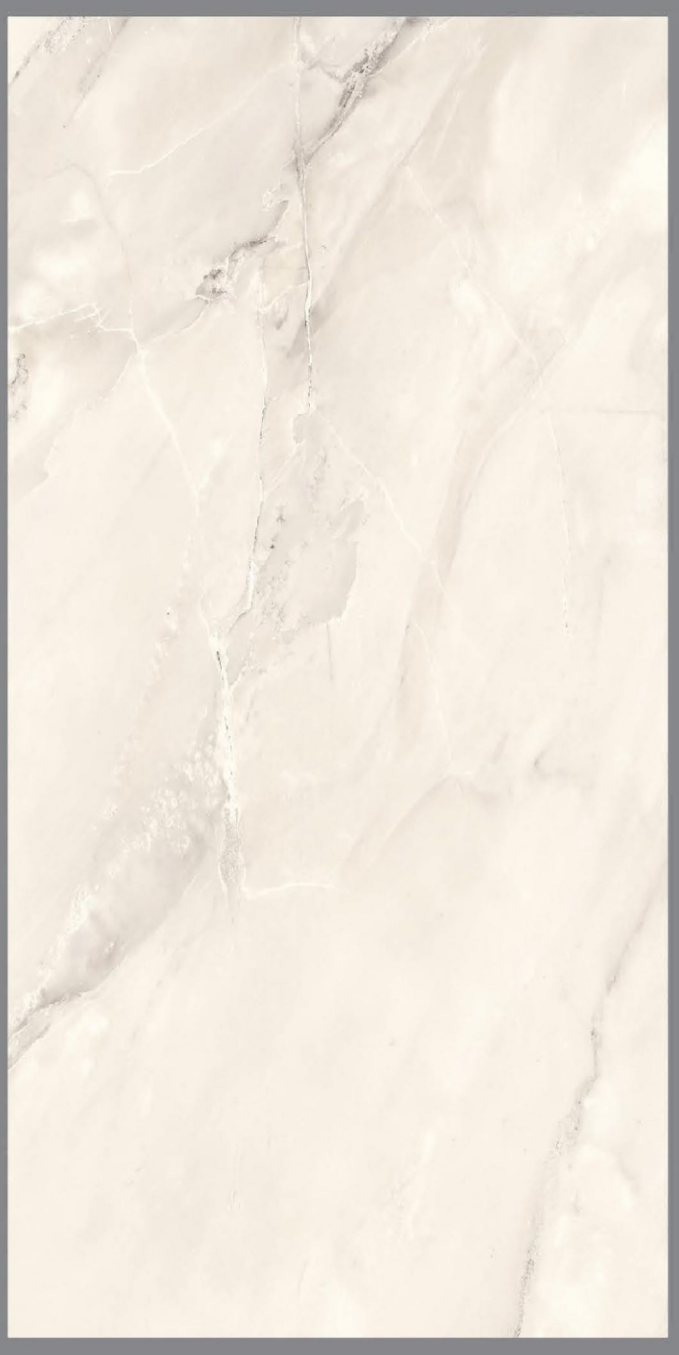




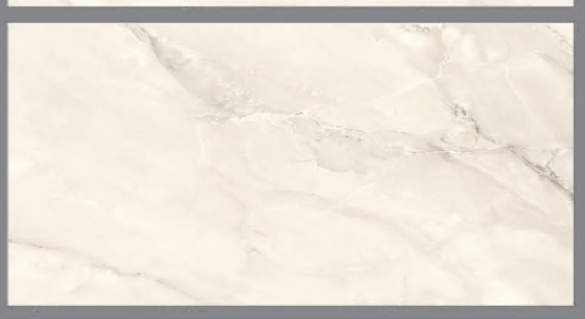

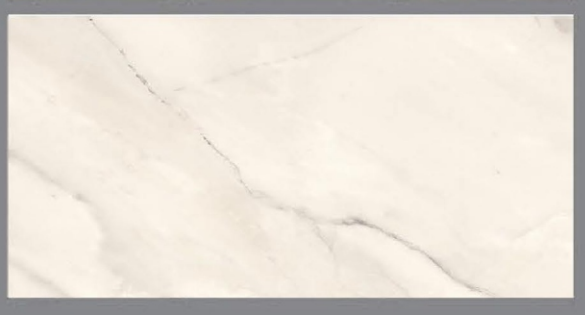




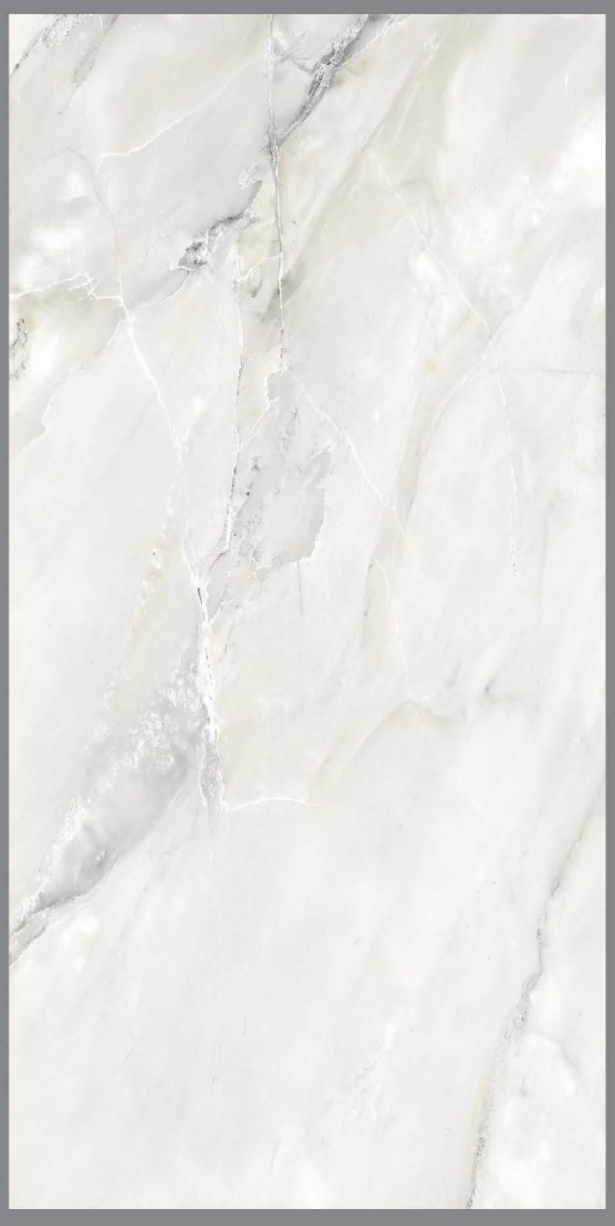



# DEKTON SILVER

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

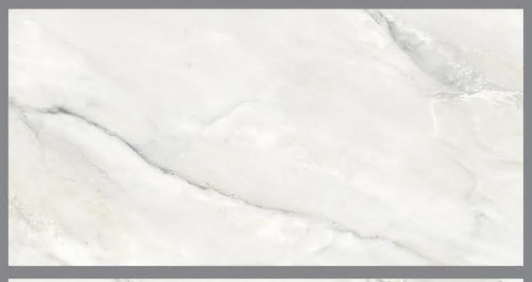

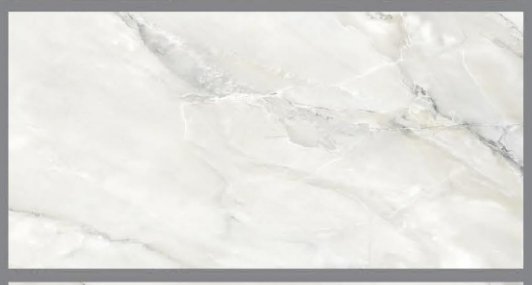

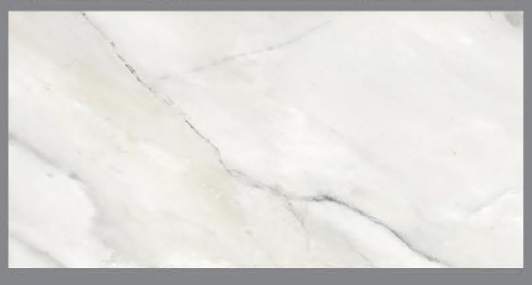







# DOLCER ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**



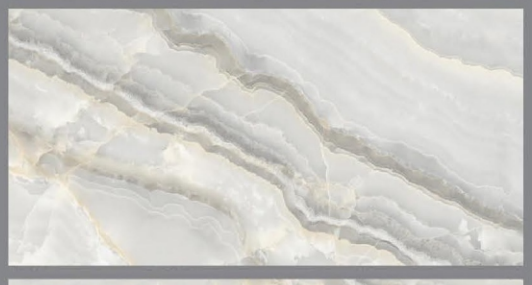

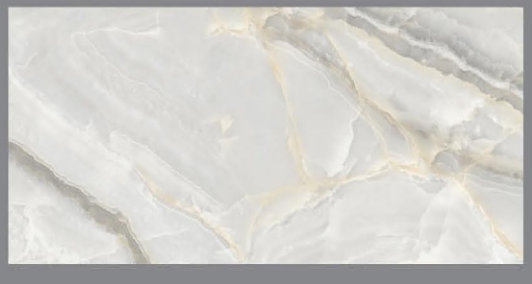





# EMERALD ONYX GREY

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**





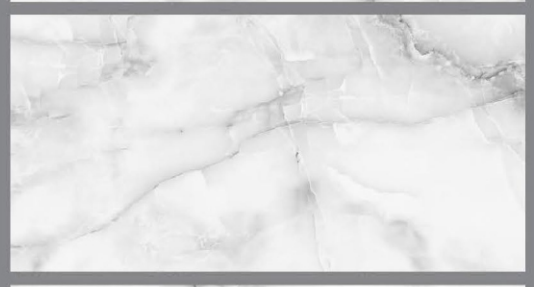





# EMERALD ONYX


**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

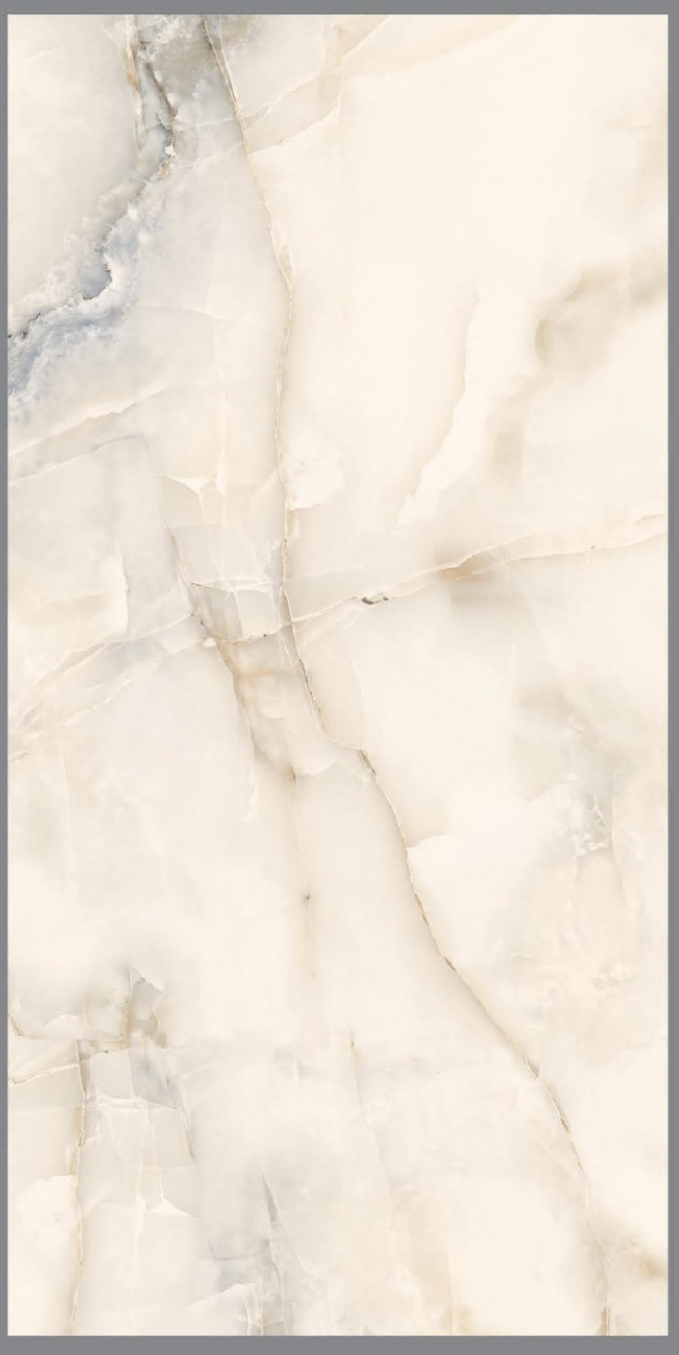



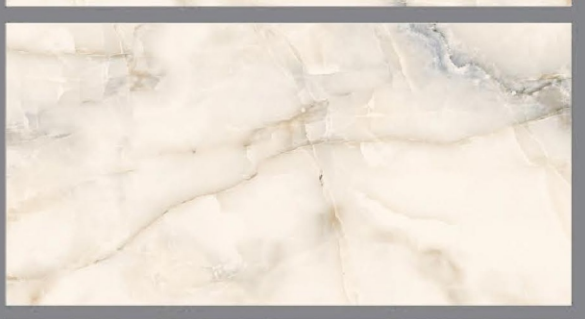

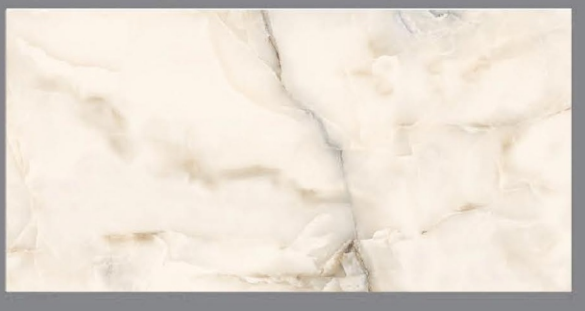



# FALCON ONYX GREY

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**




# FALCON ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**



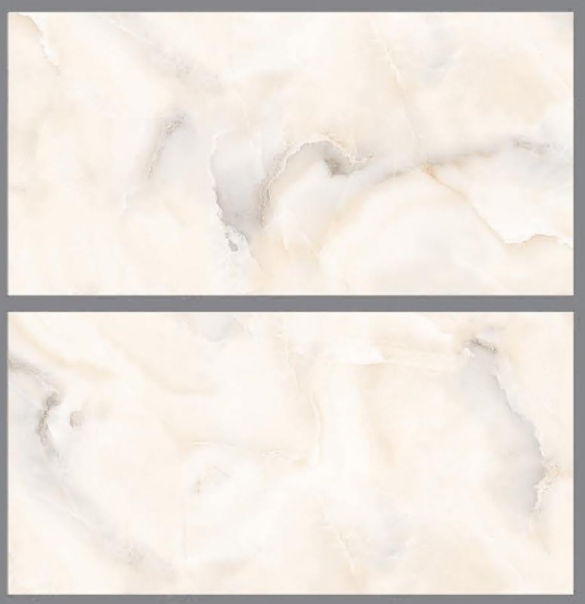










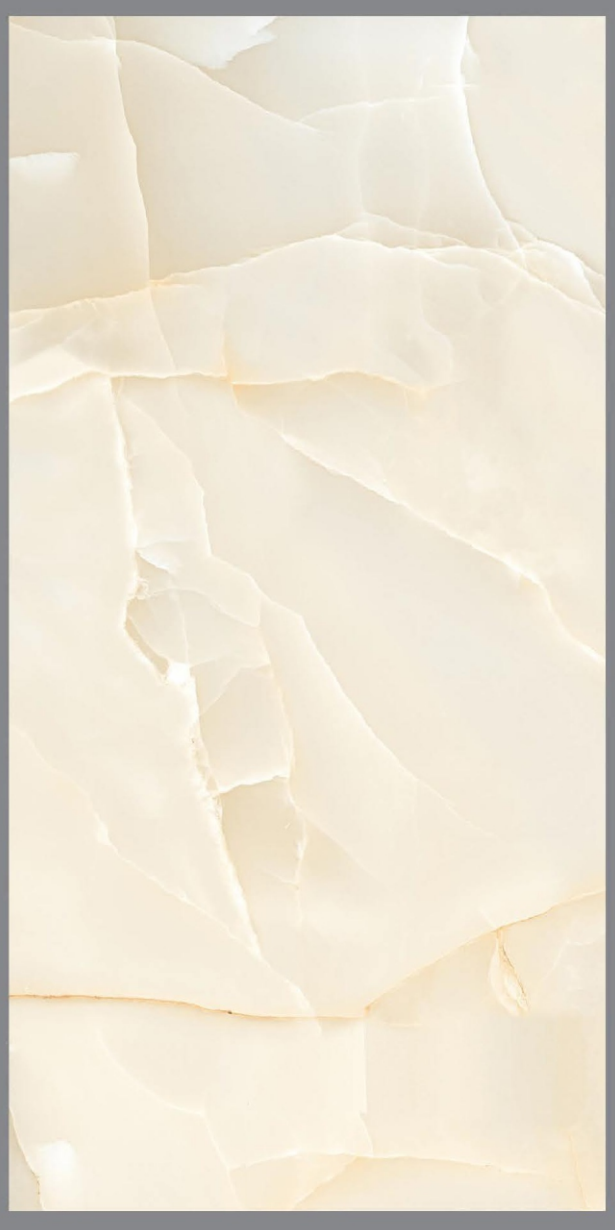


# GALAXY ONYX BEIGE

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**






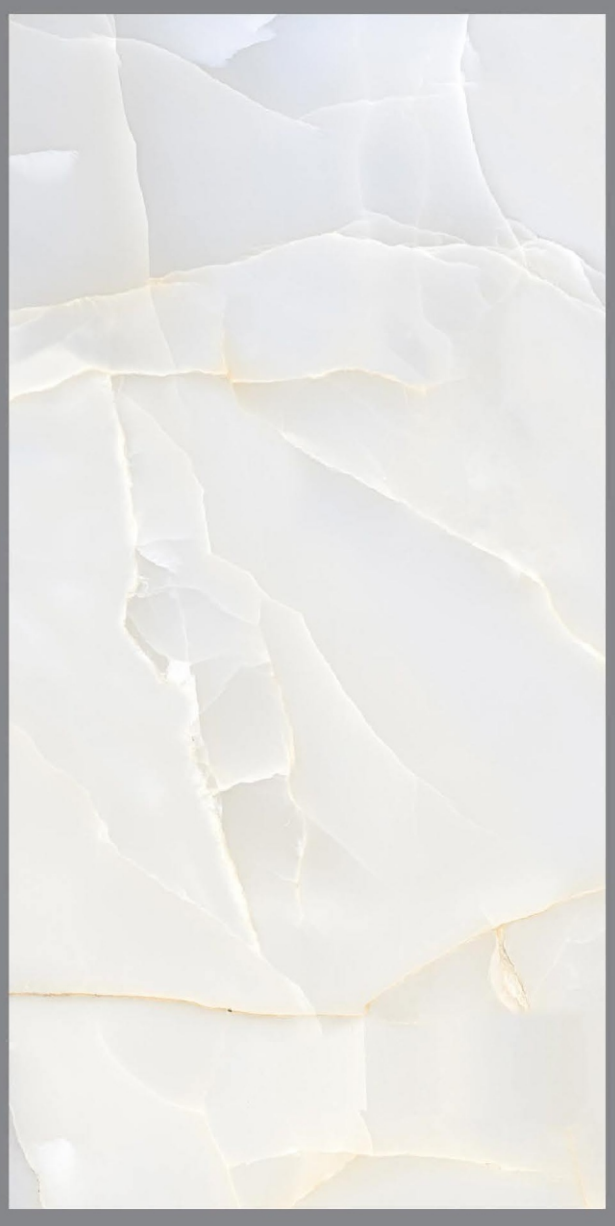

# GALAXY ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

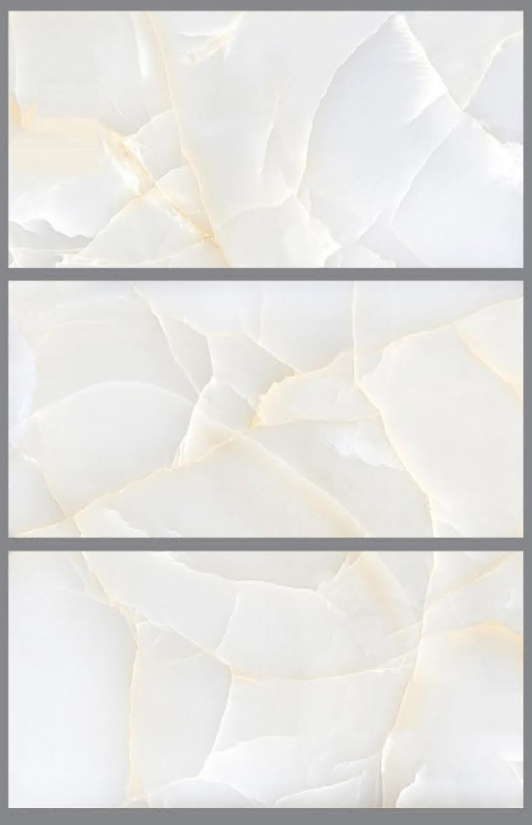






# GEMMA ONYX GRAY

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

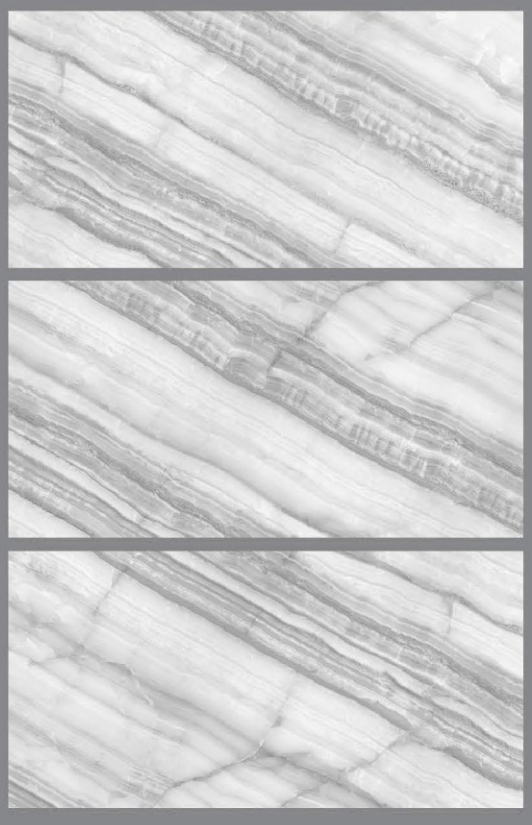




# KAVALA BIANCO

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**













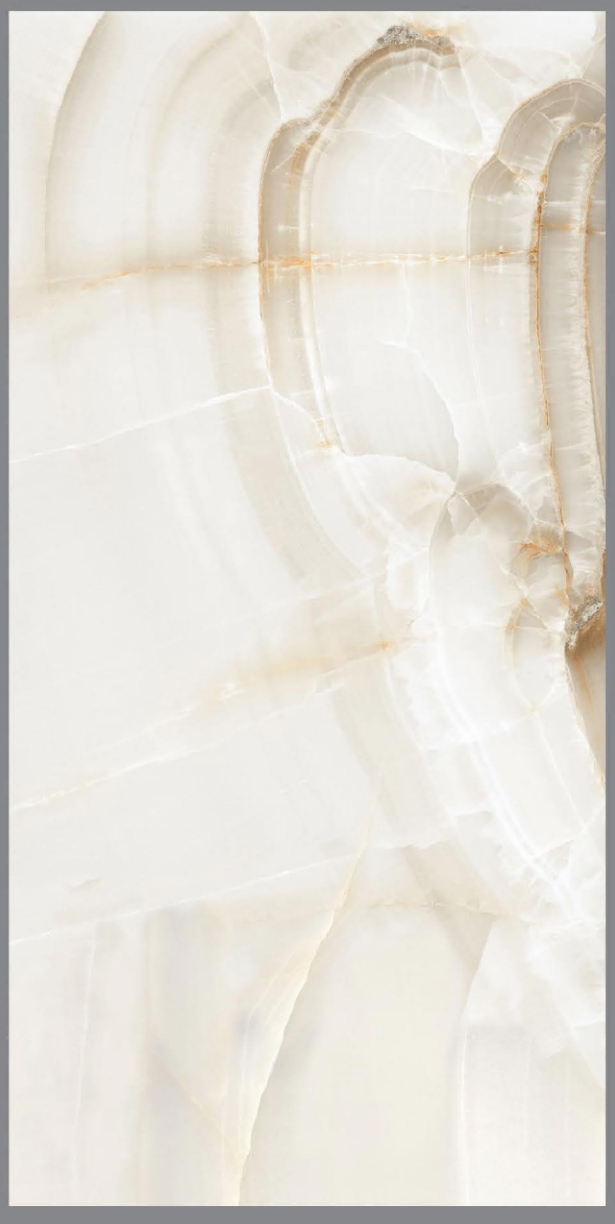



# MELODY ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

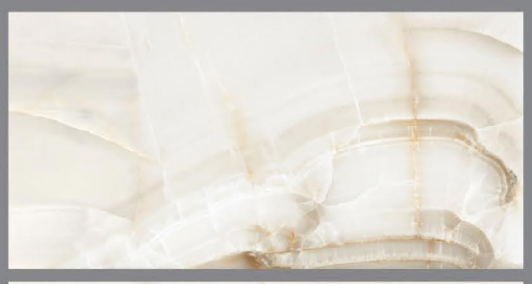

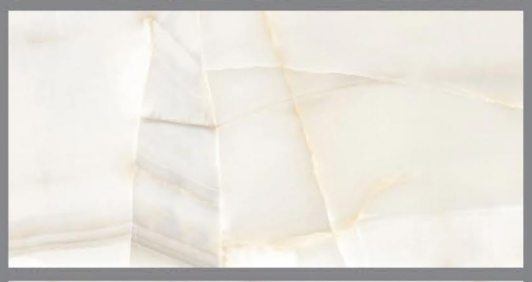

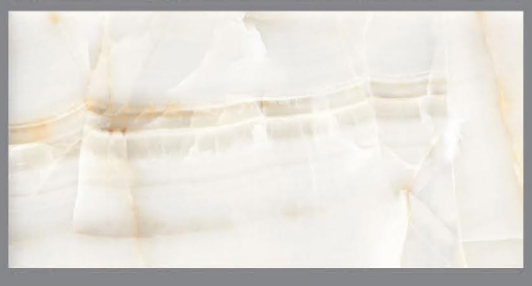

# OLIVIA BIANCO

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**














# ONYX GREEN

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

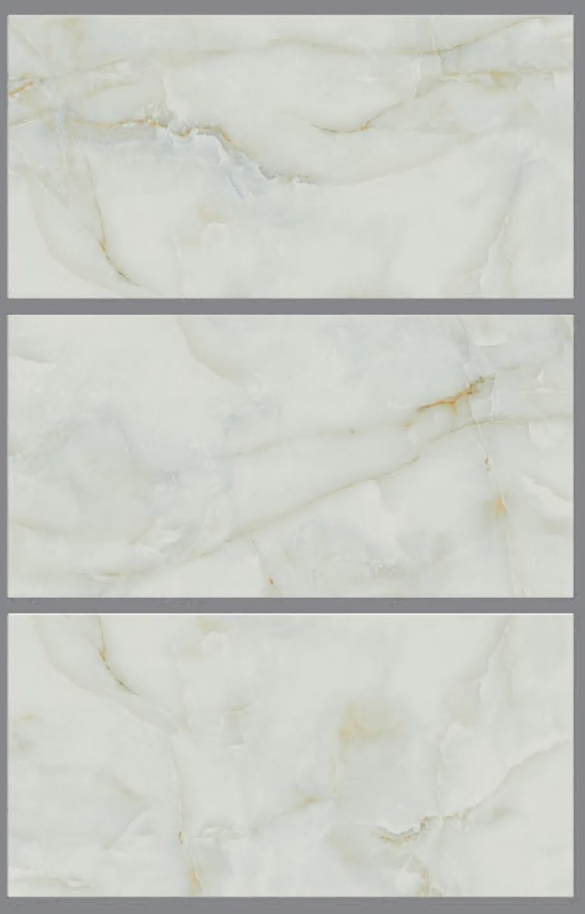

# ONYX GREY

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**












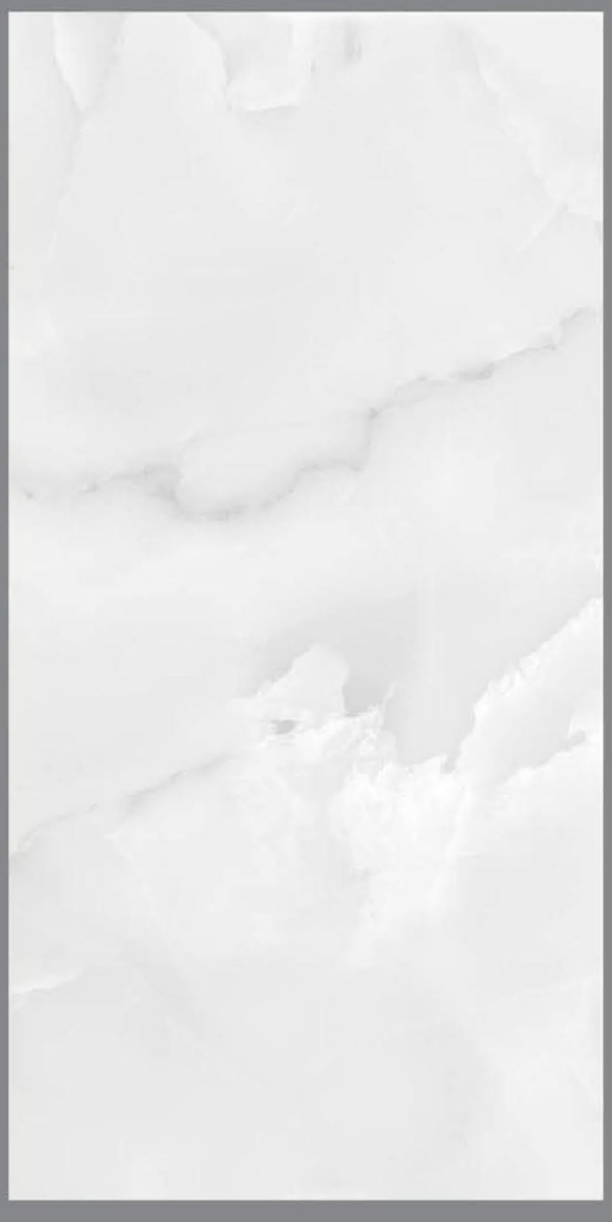

# ONYX PULS

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

**Random :**
**5**









# ROBINSON WHITE


**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**







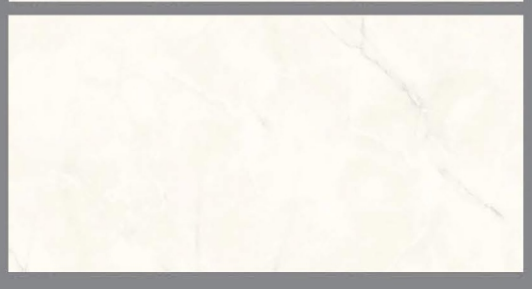





# SILVER GRIS

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**








# SOFT ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**





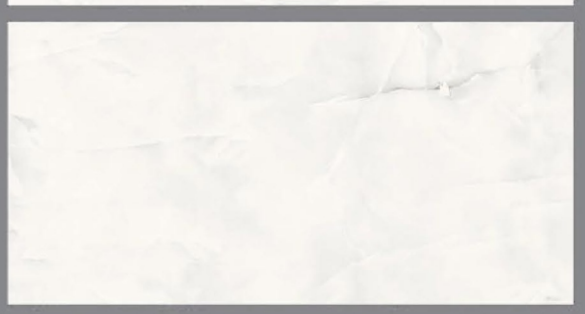





# THUNDAR ONYX GREY

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**













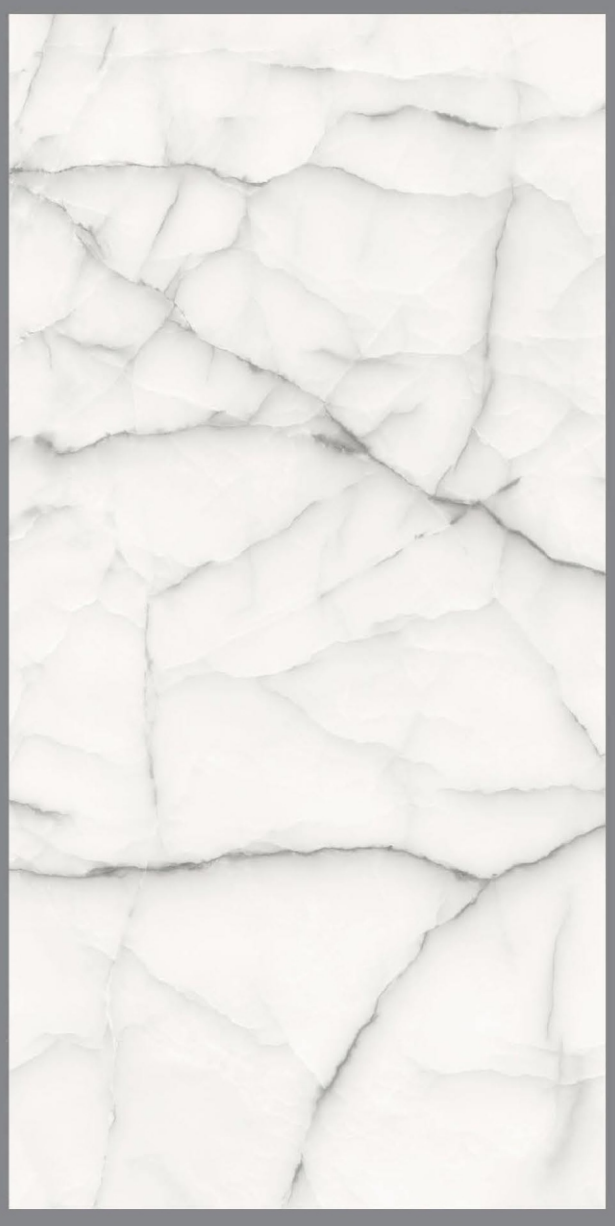

# THUNDER ONYX SILVER

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

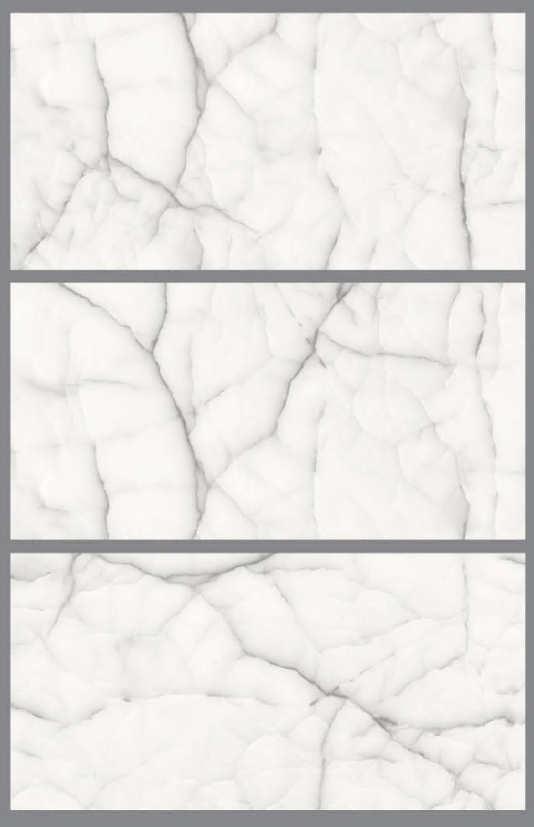







# THUNDER ONYX

**Size :**
**600 X 1200 MM**


**Finish :**
**Glossy Collection**

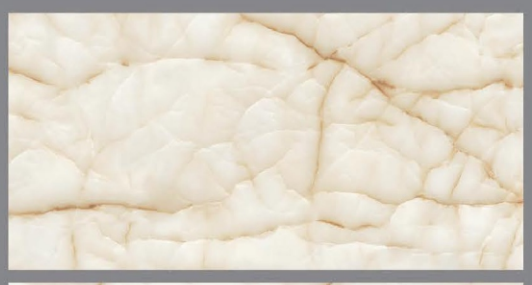



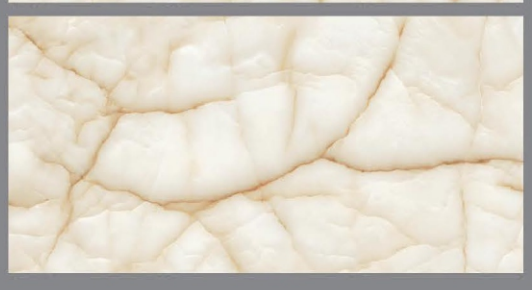



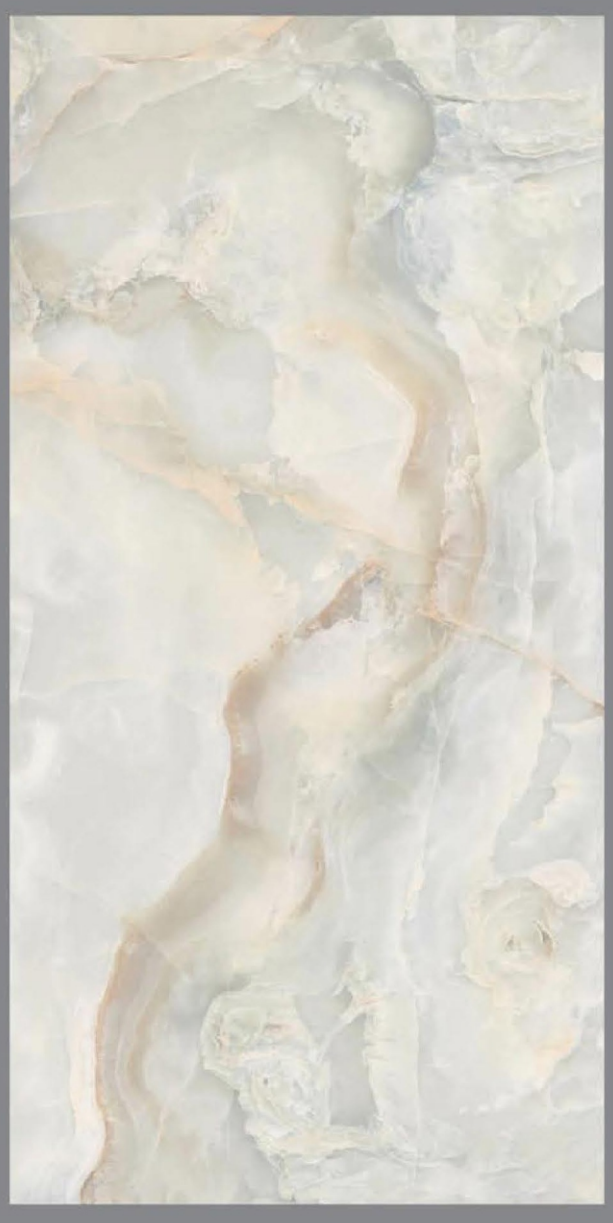

# UNIQUE ONYX

**Size :**
**600 X 1200 MM**

**Finish :**
**Glossy Collection**

**Random :**
**3**







# TECHNICAL SPECIFICATION

| CHARACTERISTIC | STANDARD AS PER ISO-13006/EN 14411 GROUP Bla | MEAN VALUE OF POLISHED GVT | MEAN VALUE OF RUSTIC GVT | TEST METHOD |
|---|---|---|---|---|
| **REGULATORY PROPERTIES** | | | | |
| Deviation in length & width | ±0.5 % | ±0.1 % | ±0.1 % | ISO-10545-2 |
| Deviation in thickness | ±5.0 % | ±4.0 % | ±4.0 % | ISO-10545-2 |
| Straightness in side | ±0.5 % | ±0.1 % | ±0.1 % | ISO-10545-2 |
| Rectangularity | ±0.5 % | ±0.1 % | ±0.1 % | ISO-10545-2 |
| Surface flatness | ±0.5 % | ±0.2 % | ±0.2 % | ISO-10545-2 |
| Color difference | Unaltered | No change | No change | ISO-10545-16 |
| Glossiness | As per mfg | Min 90% | Min 4% | GLOSSOMETER |
| **STRUCTURAL PROPERTIES** | | | | |
| Water absorption | < 0.50 % | <0.05% | <0.05% | ISO-10545-3 |
| Apparent density | > 2.0 g/cc | >2.10 g/cc | >2.10 g/cc | DIN 51082 |
| **MASSIVE MECHANICAL PROPERTIES** | | | | |
| Modulus of rupture | Min. 35 $N/mm^2$ | Min. 40 $N/mm^2$ | Min. 40 $N/mm^2$ | ISO-10545-4 |
| Breaking strength | Min. 1300 N | Min. 2000 N | Min. 2000 N | ISO-10545-4 |
| Impact resistance | As per mfg. | Min. 0.55 | Min. 0.55 | ISO-10545-5 |
| **SURFACE MECHANICAL PROPERTIES** | | | | |
| Surface abrasion resistance | As per mfg. | Min. Class-3 | Min. Class-4 | ISO-10545-7 |
| MOH's hardness | As per mfg. | Min. 4 | Min. 5 | EN 101 |
| **THERMO HYGROMETRIC PROPERTIES** | | | | |
| Frost resistance | No damage | No damage | No damage | ISO-10545-12 |
| Thermal shock resistance | No damage | No damage | No damage | ISO-10545-9 |
| Moisture expansion | Nil | Nil | Nil | ISO-10545-10 |
| Thermal expansion (COE) | Max. $9.0 \times 10^{-6}$ | Max. $6.5 \times 10^{-6}$ | Max. $6.5 \times 10^{-6}$ | ISO-10545-8 |
| Crazing resistance | As per mfg. | Min. 10 Cycle | Min. 10 Cycle | ISO-10545-11 |
| **CHEMICAL PROPERTIES** | | | | |
| Chemical resistance | No damage | No damage | No damage | ISO-10545-13 |
| Stain resistance | Resistant | Resistant | Resistant | ISO-10545-14 |
| **SAFETY PROPERTIES** | | | | |
| Slip resistance | As per mfg. | >0.40 | >0.40 | ISO-10545-17 |
| Fire resistance | As per mfg. | Fire proof | Fire proof | N. A. |
| Lead & Cadmium given off by glazed tiles | As per mfg. | Does not yield Pb & Cd | Does not yield Pb & Cd | ISO-10545-15 |

## PACKING DETAILS

| SR. NO | PRODUCT | NOMINAL SIZE | THICKNESS | TILES PER BOX | COVERAGE AREA |
|---|---|---|---|---|---|
| 1 | VITRIFIED TILES | 600x1200mm | 8.5 mm | 2 | 1.44 Sq. Mtr. |